


*Pipe Tongs*

**Do not use tong to drag or pull pipe.  
Proper use is a straight upward pull.**



The Pipe Tongs conveniently grasp the pipe to move it into the trench or about the pipe yard. The Lifting Ring closes the Clamp securely so that it can be safely moved. The pads of the Pipe Tong are made of rubber and cotton to avoid contamination of stainless and other specialty alloys. The Tongs are available for 2" to 36" / 51mm to 914mm steel, stainless steel and other specialty alloy pipes and fittings.

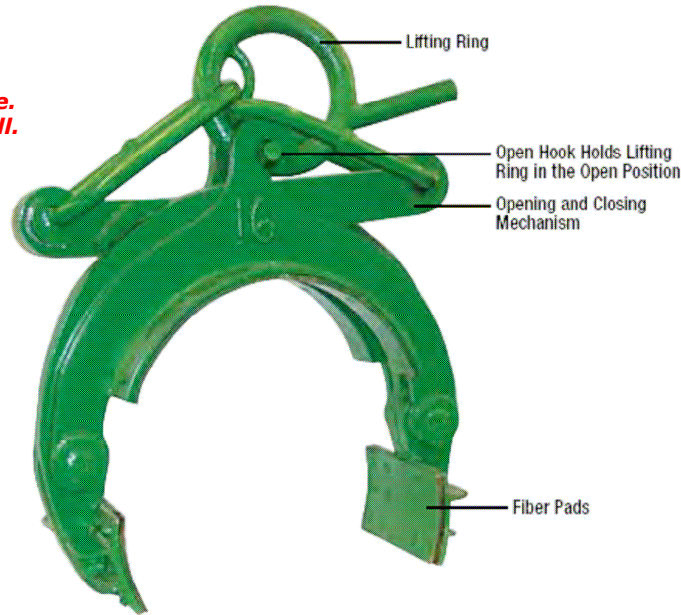

The Fiber Pad of the Automatic Pipe Tong allows the pipe to be firmly grasped, safely lifted and lowered into the trench.

**Tongs for Steel Pipe**

Model Number	Pipe Size (in / mm)	Max. Capacity (lbs. / kg)	Estimated Shipping Weight (lbs. / kg)
01-0788-002	2 / 51	2000 / 900	43 / 9
01-0788-003	3 / 76	2000 / 900	46 / 21
01-0788-004	4 / 102	2500 / 1125	47 / 21
01-0788-006	6 / 152	3000 / 1350	55 / 25
01-0788-008	8 / 203	3500 / 1575	75 / 34
01-0788-0010	10 / 254	4000 / 1800	93 / 42
01-0788-012	12 / 305	4000 / 1800	100 / 45
01-0788-014	14 / 356	4000 / 1800	118 / 53
01-0788-016	16 / 406	4000 / 1800	147 / 66
01-0788-018	18 / 457	4500 / 2025	175 / 79
01-0788-020	20 / 508	5000 / 2250	219 / 99
01-0788-022	22 / 559	5000 / 2250	232 / 104
01-0788-024	24 / 610	5000 / 2250	255 / 115
01-0788-026	26 / 660	5500 / 2475	345 / 142
01-0788-030	30 / 762	6000 / 2700	400 / 280
01-0788-032	32 / 813	6500 / 2925	516 / 232
01-0788-034	34 / 864	7500 / 3375	587 / 264
01-0788-036	36 / 914	10000 / 4500	628 / 28

**WARNING:** Do not use tongs for loads that exceed their Specified Maximum Capacity.