


NC5860 INTERNAL PNEUMATIC LINE-UP CLAMP (Self-Propelled Travel)

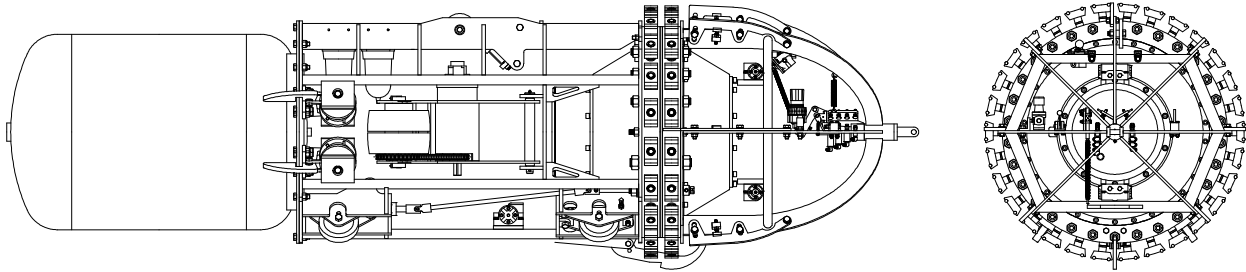

FEATURES:

- The Proline NC5860 Internal Pneumatic Line-up Clamp assures a rapid, accurate alignment of two pipes prior to welding. It is designed using the latest in technology and materials to withstand the most extreme field conditions associated with pipeline construction.
- Large air cylinders power the expander sections of the clamp for superior clamping and alignment of the pipes.
- Expander sections operate independently to lock the clamp in position.
- Specially designed shoes on each expander section exert pressure uniformly around the inside circumference of the pipe to force it into roundness.
- Designed to traverse through tight bends.
- Easily adjustable for any wall thickness within specified range.
- Travels through the pipe to the next joint under its own power.
- Large capacity air tank for extended travel in double-jointed pipes.
- Positive heavy duty side drive travel for extreme grade capability.
- Side drag brakes for extreme grade.
- Comes with tubular reach rod for remote actuation of the air valves.

SPECIFICATIONS:

- Pipe size range: 58 inch nominal (1473.2 mm) to 60 inch nominal (1524.0 mm)
- Pipe wall thickness range: 0.312-1.000 inch (7.9-25.4 mm) (for 58 inch pipe)
0.312-2.000 inch (6.4-50.8 mm) (for 60 inch pipe)
- Length: 180 inches (4572 mm)
- Width: 58 inches (1473 mm)
- Height: 58 inches (1473 mm)
- Weight: 7250 pounds (3292 kg)
- Recommended working air pressure: 200-230 pounds/in. (13.8-15.9 bar)
- Air Receiver Capacity: 450L
- Grade climbing capability: 25 degree