





Features


- Easy sliding telescopic arms.
- Quick release pins.
- Removable nylon wear pads to protect the flange.
- Total weight of only 50 LBS.
- Minimum flange diameter: Ø20" (NPS 10, Class 600)
- Maximum flange diameter: Ø33.75" (NPS 20, Class 900)
- Maximum rated load of 1,200 LBS.
- Meets ASME B30.20 and BTH-1.
- For lifting the flange in the axial direction only.

FL1020 - Capacity 1,200 LBS. - Diameter Range [20" - 33.75"]							
Flange Outer Diameter (inches)							
NPS	Class 150	Class 300	Class 400	Class 600	Class 900	Class 1500	Class 2500
10	16	17.5	17.5	20	21.5	23	26.5
12	19	20.5	20.5	22	24	26.5	30*
14	21	23	23	23.75	25.25	29.5	-
16	23.5	25.5	25.5	27	27.75	32.5	-
18	25	28	28	29.25	31	36	-
20	27.5	30.5	30.5	32	33.75	38.75	-
22	29.5	33	33	34.25	-	-	-
24	32	36	36	37	41	46	-

*Exceeds weight capacity of FL1020 Flange Lifter

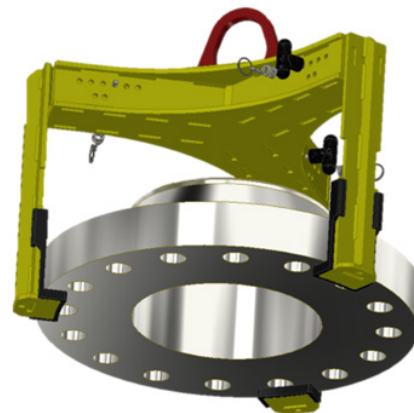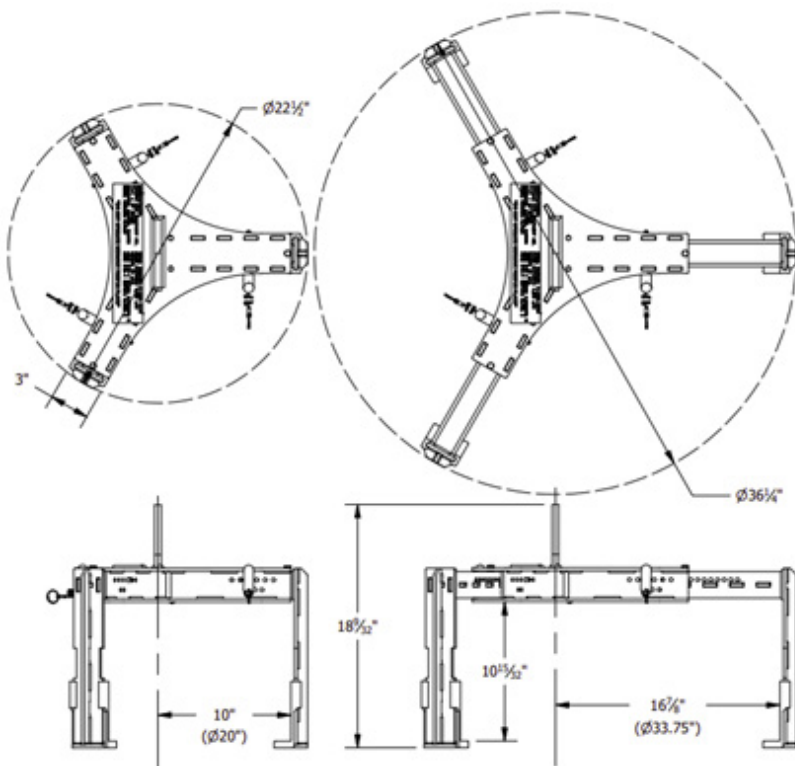

NPS 10, Class 600, Weld Neck Flange

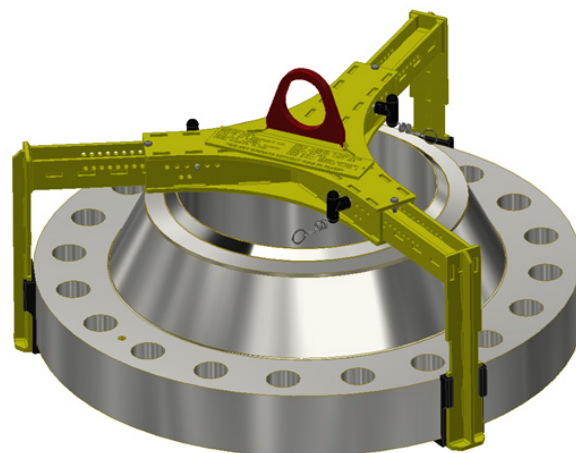

NPS 20, Class 900, Weld Neck Flange