



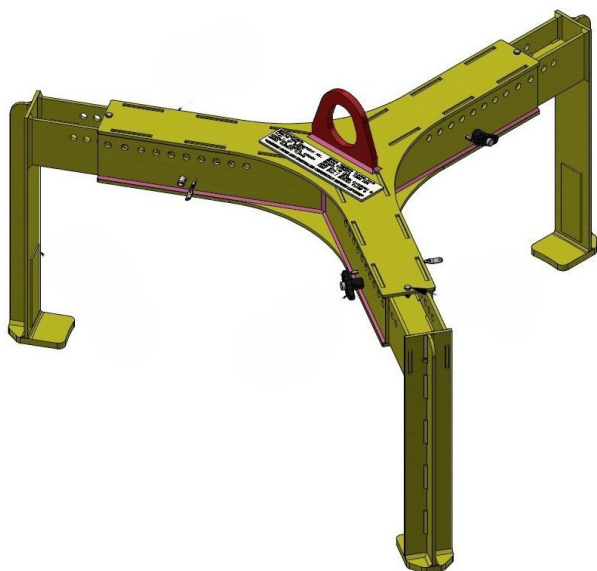

Features

- Easy sliding telescopic arms.
- Quick release pins.
- Total weight of 140 LBS.
- Minimum flange diameter: Ø36" (NPS 24, Class 300)
- Maximum flange diameter: Ø62.75" (NPS 48, Class 600)
- Maximum rated load of 7,000 LBS.
- Meets ASME B30.20 and BTH-1.
- For lifting the flange in the axial direction only.

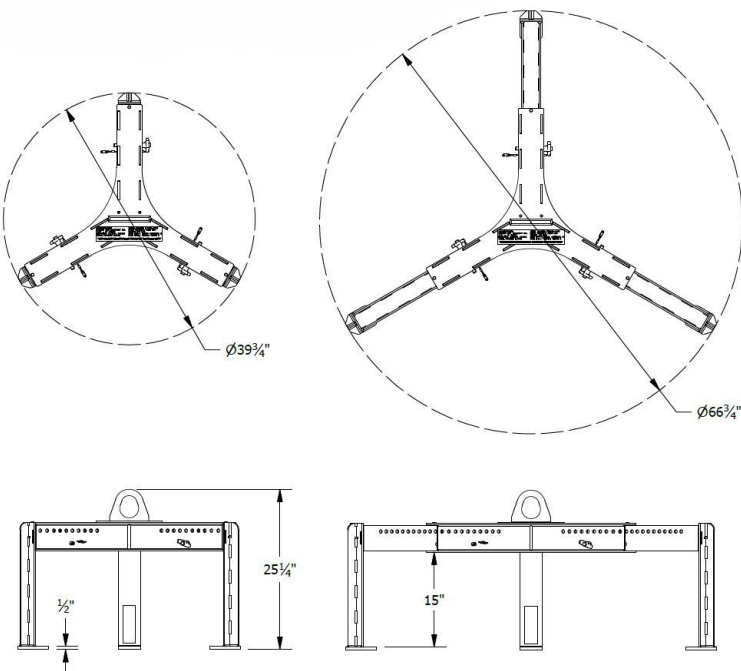

FL2448 - Capacity 7,000 LBS. - Diameter Range [36" - 62.75"]							
Flange Outer Diameter (Inches)							
NPS	Class 150	Class 300	Class 400	Class 600	Class 900	Class 1500	Class 2500
18	25	28	28	29.25	31	36	-
20	27.5	30.5	30.5	32	33.75	38.75	-
22	29.5	33	33	34.25	-	-	-
24	32	36	36	37	41	46	-
26	34.25	38.25	38.25	40	42.75	-	-
28	36.5	40.75	40.75	42.25	46	-	-
30	38.75	43	43	44.5	48.5	-	-
32	41.75	45.25	45.25	47	51.75	-	-
34	43.75	47.5	47.5	49	55	-	-
36	46	50	50	51.75	57.5	-	-
38	48.75	46	47.5	50	57.5	-	-
40	50.75	48.75	50	52	59.5	-	-
42	53	50.75	52	55.25	61.5*	-	-
44	55.25	53.25	54.5	57.25	64.875	-	-
46	57.25	55.75	56.75	59.5	68.25	-	-
48	59.5	57.75	59.5	62.75	70.25	-	-
50	61.75	60.25	61.75	65.75	-	-	-
52	64	62.25	63.75	67.75	-	-	-

*Exceeds weight capacity of FL2448 Flange Lifter