


# INTERCHANGEABLE PIPE ARM

## 4-12"

Designed with interchangeable pipe tips to easily handle 4-12" diameter coated or uncoated pipe using the DECKHAND S, DECKHAND, or DECKHAND 5HP models

- Handles pipe on and off trailers, rail cars, or pipe rack without disturbing adjacent pipe
- Sensors allow operator to monitor arm grip status while moving pipe
- Load locking valve system ensures pipe is never dropped
- Proximity sensors inform operator of correct positioning and clearance
- Pipe can be lifted from an off-center position
- Arms utilize long lasting wear pads to protect coated pipe from damage
- Fast and efficient at stringing pipe during pipeline construction
- Can handle pipe covered with snow, ice or dirt

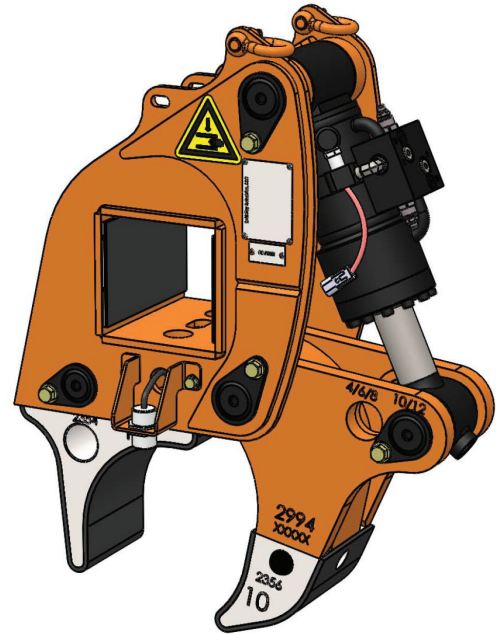

### DECKHAND INTERCHANGEABLE PIPE ARM

#### 4-12 INCH IPA SPECIFICATIONS

Part Number	2375
Model Number	IPA
Main Beam Size (inches)	6x6
Material Capacity	4-12 IN / 10 - 30.5 CM
Capacity (per two arms)	11,000 LB / 4,990 KG
Weight (without tips)	320 LB / 145 KG
Shipping Crate P/N	2577
Shipping Dimensions (arm set in crate)	40L x 34W x 44H IN / 102L x 86W x 112H CM
Shipping Weight (arm set with crate and no tips)	970 LB / 440 KG